


SureShipper


Fully Automatic
Top & Bottom Case Sealer



PRIMARY
CONVEYING



CASE
PACKING



SECONDARY
CONVEYING




TRACE & TRACK



PALLETIZING



WAREHOUSE
AUTOMATION



TRUCK LOADING

Reflex Technologies Pvt. Ltd.

EL51, Electronic Zone, MIDC, Mahape, Navi Mumbai 400710 INDIA.

Tel : +91 022 27682584; Email: sales@reflexautomation.com ; www.reflexautomation.com

Machine Description

BOPP tapes are widely used to seal Cartons. It does a good job, except for 2 serious problems

- Pilferage
- Usage of Plastic

Should the above limitations pose a problem to your organization, sweat no more. Reflex's **SureShipper** solves exactly these problems.

Instead of BOPP, **SureShipper** uses Hot Melt to securely bond the Major and Minor flaps of your shipper to ensure a 100% closure. Since the flaps are glued together, the shipper cannot be opened unless the flaps are torn apart. This ensure non-pilferage of your consignment.

Models Available: 9 Models to choose from

Shipper Size	Compact Width up to 200 mm	Regular Width 200 mm to 400 mm	Jumbo Width above 400 mm
Machine Flexibility			
Eco Multiple SKUs. Change time : 10 mins	<u>Model 1</u> Compact Eco	<u>Model 2</u> Regular Eco	<u>Model 3</u> Jumbo Eco
Batch Multiple SKU Change time : 2 mins	<u>Model 4</u> Compact Batch	<u>Model 5</u> Regular Batch	<u>Model 6</u> Jumbo Batch
Random Multiple SKU Automatic Change Over	<u>Model 7</u> Compact Random	<u>Model 8</u> Regular Random	<u>Model 9</u> Jumbo Random

Machine Salient Feature *


1	Can speeds of up to 40 shipper per minute *
2	IP42 design ensure trouble free running.
3	Programmable Glue pattern
4	Simple and robust escapement mechanism ensures perfect flow of shippers *
5	Easy change-over between SKUs.
6	Ingenious design ensures products do not fall off in spite of opening the bottom flaps*
7	Customized modifications possible to handle very tricky products
8	Indigenous design and manufacturing ensures all spares available locally.
9	Use of high quality standard product ensures high reliability and ease in maintenance.
10	All hot parts safely covered for operator safety

* Please check applicability with model

Machine Technical Specifications

Technical Specification	
Speed	Up to 40 spm*
Input conveyor height	800 mm
Material of Construction	MS with Powder Quoting
Power Supply	Single Phase 240 V AC
Power Consumption	3 kW*
Air Supply	6 bar
Air Consumption	2 CFM*

Machine Dimensions: “ SureShipper Regular Eco” shown below.

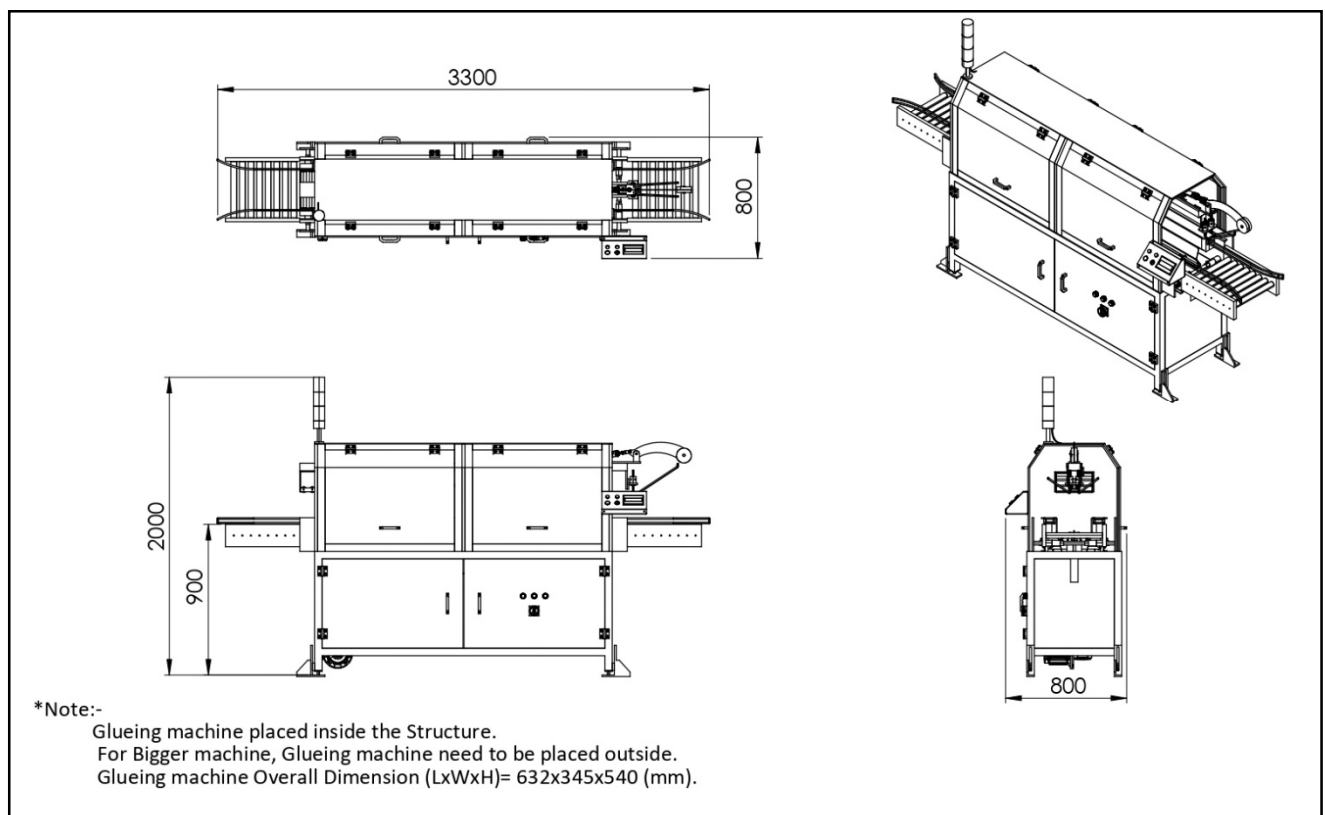

Notes:

Reflex Technologies Pvt. Ltd.

EL51, Electronic Zone, MIDC, Mahape, Navi Mumbai 400710 INDIA.

Tel : +91 022 27682584; Email: sales@reflexautomation.com ; www.reflexautomation.com